



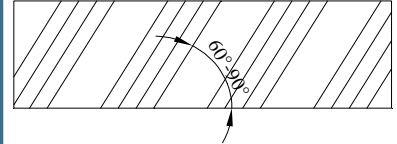
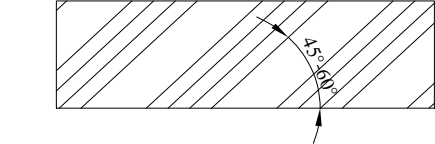
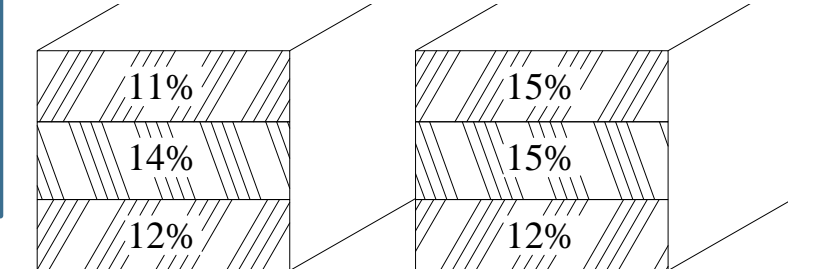
# Generic Options

## Timber

All Bereco products can be supplied in either **Softwood (Redwood)** or **Hardwood (DRM)**.

All Bereco products are manufactured using fully engineered timber to give dimensional stability, longevity and high performance.

Only certified timber from well managed sources, with full FSC accreditation is used. Defects that naturally occur in timber are removed which allows us to manufacture a finished product that has all the benefits of timber but none of the disadvantages.

<b>Softwood</b>	<b>Scandinavian Pine:</b> Defect free, laminated with either clear or finger- jointed surface. Density $\geq 350\text{kg/m}^3$	<b>'standing' grain</b> 	<b>'half-standing' grain</b> 	<b>Grain:</b> Only 'Standing' or 'Half-standing' grain is used. Max width of grain = 6mm
<b>Hardwood</b>	<b>Dark Red Meranti:</b> Defect free, laminated with clear surface. Density $\geq 450\text{kg/m}^3$			<b>Moisture Content:</b> Moisture content of the timber sections are controlled to optimum levels of 13% + / - 2%. The diagram shows possible variations within each laminate section of the engineered timber.